

10/532644

PCT 200 3 / 0 5 0 8 7 2



REC'D 05 APR 2004	
WIPO	PCT



INVESTOR IN PEOPLE

The Patent Office
 Concept House
 Cardiff Road
 Newport
 South Wales
 NP10 8QQ

EPO - DG 1

26.03.2004


(93)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

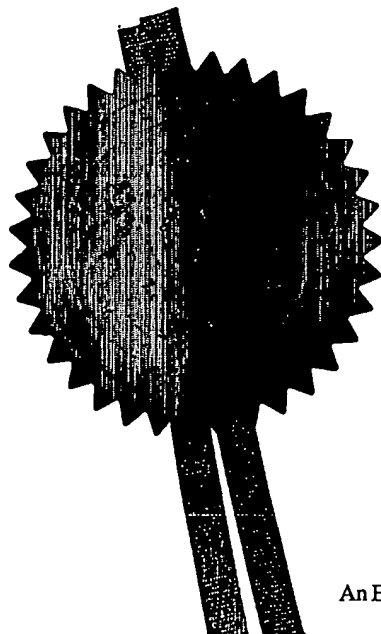

P. Mahoney

Signed

Dated 12 February 2004

**PRIORITY
 DOCUMENT**

SUBMITTED OR TRANSMITTED IN
 COMPLIANCE WITH RULE 17.1(a) OR (b)

Patents Form 1/77


Patents Act 1977
(Rule 16)

The
Patent
Office

22NOV02 E765601-3 001063
P01/7790 0.00-0227293.8

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

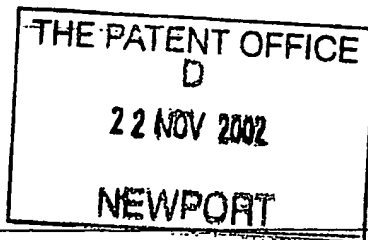

The Patent Office

Cardiff Road
Newport
South Wales
NP9 1RH

1. Your reference

AMS.P52428GB

2. Patent application number

(The Patent Office will fill in this part)

0227293.8

22 NOV 2002

3. Full name, address and postcode of the or of each applicant (underline all surnames)

847217001

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

WesternGeco Seismic Holdings Limited
Citco Building
PO Box 662
Roadtown
Tortola, British Virgin Islands

British Virgins Islands

4. Title of the invention

Seismic Acquisition System

5. Name of your agent (if you have one)

Marks & Clerk

Address for service in the United Kingdom to which all correspondence should be sent (including the postcode)

4220 Nash Court
Oxford Business Park South
Oxford OX4 2RU
United Kingdom

7271125001

Patents ADP number (if you know it)

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

6. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form	0
Description	13
Claim(s)	5
Abstract	1
Drawing(s)	9

8

α

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

/

Request for preliminary examination and search (Patents Form 9/77)

1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/We request the grant of a patent on the basis of this application.

Signature

Mal & Chel

Date

Marks & Clerk

21 November 2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Dr Andrew Suckling
(01865) 397900

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

SEISMIC ACQUISITION SYSTEM

BACKGROUND OF THE INVENTION

5 1. FIELD OF THE INVENTION

The present invention pertains to seismic acquisition, and, more particularly, to a method of collecting data during a seismic acquisition.

10 2. DESCRIPTION OF THE RELATED ART

Seismic surveying traditionally involves imparting acoustic waves from an acoustic source that propagate through subterranean geological formations and are reflected back to seismic sensors. The seismic sensors are deployed in arrays and are positioned through the area being surveyed. The reflected signals are transformed into electrical or optical signals that are then transmitted over electrical or optical cables to a data collection unit. In a land-based survey, the data collection unit is usually housed on a recording truck. The data collection unit either records the signals it receives, analyzes them in real-time, transmits them to a remote location for analysis, or some combination of these things.

Recent trends in seismic surveying are producing larger arrays of seismic sensors. These arrays are larger both in terms of coverage area and in terms of the number of seismic sensors. The larger arrays adversely impact the cost of conducting the survey. Not only do these larger arrays employ more pieces of equipment, but their extended coverage area lengthen deployment time. The more time it takes to deploy the array, and the more pieces of equipment it uses, the more expensive the survey.

Attempts in the art to address these factors include U.S. Letters Patent 6,226,601, entitled "Seismic Survey System," and issued May 1, 2001, to Trimble Navigation Limited as assignee of the inventor Harold L. Longaker ("the '601 patent"). In particular, this patent discloses a wireless seismic system in an effort to eliminate, or at least minimize, cabling. The system includes multiple layers of "cells." The seismic sensors are grouped in a particular fashion, and each group of seismic sensors wirelessly transmits its data to a dedicated, first level transceiver. The first level transceivers are similarly grouped, and each group of first level transceivers wirelessly transmits the data accumulated from its group of

seismic sensors to a dedicated, second level transceiver. This process repeats, and each higher level sees a further consolidation of data from the previous layer. At some point, the data is completely consolidated or has reached some desired level of consolidation. The consolidated data is then wirelessly transmitted to a data collection unit.

5

Conventional wireless approaches, such as the one in the '601 patent mentioned above, use a variety of communications protocols. These communications protocols include:

- 10 GSM-DCS, or Global System for Mobile Communications-Digital Cellular System, which employs a form of time-division multiplexing called Time Division Multiple Access ("TDMA"), used for cellular telephony in much of Europe and Asia;
- 15 UMTS, or Universal Mobile Telecommunications System, used to deliver broadband information at speeds up to 2Mbit s/sec, including audio and video, to wireless devices anywhere in the world through fixed, wireless and satellite systems;
- 20 DECT, or Digitally Enhance Cordless Telecommunications, a common standard for cordless personal telephony originally established by the European Telecommunications Standards Institute ("ETSI"), a European standardization body, for cordless business communications;
- CDMA, or Code-Division Multiple Access, a digital cellular technology that uses spread-spectrum techniques; and
- GPRS, or General Packet Radio Service, a standard for wireless communications which runs at speeds up to 115 kilobits per second and supports a wide range of bandwidths.

25 However, the application of each of these protocols brings its own problems. For instance:

- UMTS, DECT, and CDMA are telephony oriented, rather than network oriented, which imposes undesirable restrictions on communication of data in a seismic acquisition environment;
- UMTS is unproven in terms of its components;
- 30 UMTS and GSM have the same upstream bandwidth as downstream bandwidth, which is wasteful in a seismic acquisition system needing a much higher upstream bandwidth than downstream bandwidth;

- GPRS allocates more than one channel downstream and sometimes none upstream, which is contrary to the needs of a seismic acquisition system;
- GSM-DSC causes a poor use of the number of channels in the cell versus the possible range of the cell because of a disparity between the density of geophones in the cell and the surface area of the cell; and
- GSM-DSC still employs a wire between its base transceiver unit ("BTS") and the Basic Station Controller ("BSC") and between the BSC and the central recording and processing system.

Thus, current wireless techniques applied in seismic acquisition leave much to be desired.

The present invention is directed to resolving, or at least reducing, one or all of the problems mentioned above.

SUMMARY OF THE INVENTION

The invention includes, in its various embodiments and aspects, an apparatus and method for collecting data acquired during a seismic survey.

The apparatus is a seismic survey system, comprising a plurality of data sources, a plurality of cells, and a plurality of independent pathways. The data sources are positioned about an area to be surveyed, each data source being associated with a transmitter capable of transmitting data. The cells each contain a portion of the data sources and their associated transmitters. One of the transmitters within each cell also serves as a gateway for receiving data transmitted from the other data source transmitters within the cell. The independent pathways each contain a portion of the gateways whereby data may be transmitted along each pathway via the gateways and associated transmitters in that pathway.

The method is a method for conducting a seismic survey. The method comprises positioning a plurality of seismic data sources about an area to be surveyed; defining a plurality of cells such that each cell contains a portion of the seismic data sources; defining one of the seismic data sources within each cell to also serve as a gateway; defining a plurality of independent pathways such that each pathway contains a portion of the gateways; within each respective cell, transmitting seismic data from the seismic data sources to the gateway; and, within each pathway, transmitting the seismic data from one gateway to another to reach a central location.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention may be understood by reference to the following description taken in conjunction with the accompanying drawings, in which like reference numerals identify like elements, and in which:

5 **FIG. 1** illustrates a land-based seismic survey employing a seismic array constructed, deployed, and operated in accordance with one particular embodiment of the present invention

FIG. 2 conceptually illustrates the seismic array in **FIG. 1**;

10 **FIG. 3** depicts a grouped data acquisition cell from **FIG. 2** in greater detail;

FIG. 4A and **FIG. 4B** illustrate alternative implementations of a basic data acquisition cell such as may comprise the grouped data acquisition cell of **FIG. 3**;

FIG. 5A and **FIG. 5B** conceptually illustrate a data collection unit as may be used in the embodiment of **FIG. 1**;

15 **FIG. 6A**, **FIG. 6B**, and **FIG. 6C** illustrate one particular embodiment in which grouped data acquisition cells overlap;

FIG. 7 illustrates a second embodiment alternative to that in **FIG. 6A**, **FIG. 6B**, and **FIG. 6C** in which the grouped data acquisition cells not only overlap, but are interleaved;

20 **FIG. 8A** and **FIG. 8B** illustrate a third embodiment alternative to those in **FIG. 6A**, **FIG. 6B**, and **FIG. 6C** and in **FIG. 7** in which relay points are employed between interleaved grouped data acquisition cells and the data collection unit to improve bandwidth; and

FIG. 9 illustrates a fourth embodiment alternative to those in **FIG. 6A**, **FIG. 6B**, and **FIG. 6C**, in **FIG. 7**, and in **FIG. 8A** and **FIG. 8B**.

25 While the invention is susceptible to various modifications and alternative forms, the drawings illustrate specific embodiments herein described in detail by way of example. It should be understood, however, that the description herein of specific embodiments is not intended to limit the invention to the particular forms disclosed, but on the contrary, the intention is to cover all modifications, equivalents, and alternatives falling within the spirit
30 and scope of the invention as defined by the appended claims.

DETAILED DESCRIPTION OF THE INVENTION

Illustrative embodiments of the invention are described below. In the interest of clarity, not all features of an actual implementation are described in this specification. It will of course be appreciated that in the development of any such actual embodiment, numerous implementation-specific decisions must be made to achieve the developers' specific goals, such as compliance with system-related and business-related constraints, which will vary from one implementation to another. Moreover, it will be appreciated that such a development effort, even if complex and time-consuming, would be a routine undertaking for those of ordinary skill in the art having the benefit of this disclosure.

FIG. 1 illustrates a land-based seismic survey employing a seismic survey system 100 in accordance with the present invention. The apparatus includes a seismic recording array 105 constructed, deployed, and operated as discussed further below. The seismic recording array 105 includes a plurality of data sources 106 positioned about an area to be surveyed, each data source 106 being associated with a transmitter 108 capable of wirelessly transmitting data collected by the data sources 106, as indicated by the wireless link 109. The data sources 106 are implemented, in the illustrated embodiment, with, *e.g.*, conventional geophones as are known to the art.

FIG. 1 shows the seismic recording array 105 connected to the recording truck 110 via the wireless link 109. A seismic source 115 is also shown. A data collection unit 120 is shown centrally located on the recording truck 110. However, as will be appreciated by those skilled in the art, various portions of the data collection unit 120 may be distributed in whole or in part, *e.g.*, across the seismic recording array 105, in alternative embodiments. The seismic source 115 generates a plurality of seismic survey signals 125 in accordance with conventional practice. The seismic survey signals 125 propagate and are reflected by the subterranean geological formation 130. The seismic data sources 120 receive the reflected signals 135 off the geological formation 130 in a conventional manner.

The seismic data sources 106 then generate data representative of the reflections 135, and the seismic data is embedded in electromagnetic signals. The electromagnetic signals are then communicated to the data collection unit 120 in accordance with the present invention. More particularly, the seismic data sources 106 communicate the seismic data they collect to

the data collection unit 120 over the wireless link 109 through the transmitter 108 in a manner discussed more fully below.

The data collection unit 120 collects the seismic data for processing. The data
 5 collection unit 120 may process the seismic data itself, store the seismic data for processing at a later time, transmit the seismic data to a remote location for processing, or some combination of these things. In the illustrated embodiment, the data collection unit 120 transmits the seismic data to a fixed-base facility 140 via a satellite 145 and the satellite links 150, although this is not necessary to the practice of the invention. Ultimately, in accordance
 10 with the present invention, the data collected by the seismic data sources 106 is transmitted to a central facility or location. This central facility may be a computing and storing center ("CSC"), e.g., the recording truck 110 or the fixed-base facility 140.

FIG. 2 conceptually illustrates the arrangement of the data sources 106 in the seismic
 15 recording array 105 in FIG. 1. The seismic array 105 comprises a plurality of grouped data acquisition cells ("GDACs") 200. In the illustrated embodiment, there are four, but the invention is not so limited. The number of GDACs 200 will vary by implementation. An individual GDAC 200 is depicted in FIG. 3. Each GDAC 200 comprises a plurality of basic data acquisition cells ("BDACs") 300. The number of BDACs 300 in each 200 is not
 20 material to the practice of the invention, but three BDACs 300 are shown in the GDAC 200 of FIG. 3. Note that the number of BDACs 300 in any given GDAC 200 may vary. For instance, one GDAC 200 may comprise three BDACs 300 while another GDAC 200 in the same array may comprise four BDACs 300.

Each BDAC 300 comprises a plurality of seismic sensors 305 and a central
 25 transmission unit 310. The connections between the seismic sensors 305 and the central transmission units 310 may be wired, as in the BDAC 400a in FIG. 4A, or wireless, as in the BDAC 400b in FIG. 4B. The seismic sensors 305 will typically be acquisition devices, e.g., geophones, but other types of seismic sensors may also be employed. For instance, some of
 30 the seismic sensors may be positioning devices, e.g., Global Positioning System ("GPS") receivers. Still other kinds of seismic sensors may also be employed. However, in at least one BDAC 300 of each GDAC 200, the transmitter 315 is also capable of receiving seismic data from the other transmitters 310 and transmitting that seismic data along with its own.

Thus, the seismic recording array 105 includes a plurality of cells, *e.g.*, the GDACs 300. Each cell contains a portion of the data sources 106, *e.g.*, the data sources 305, and their associated transmitters, *e.g.*, the transmitters 310. One of the transmitters within each cell, *e.g.*, the transmitter 315, also serves as a "gateway" for receiving data transmitted from the other data source transmitters, *e.g.*, the transmitters 310, within the cell.

As noted relative to FIG. 1, the seismic survey system 100 includes at least one data collection system 120. Note that some alternative embodiments may employ multiple data collection systems 120. The recording truck 105 is equipped with a rack-mounted computing apparatus 500, illustrated in FIG. 5A and FIG. 5B, with which at least a portion of data collection system 140 is implemented. The computing apparatus 500 includes a processor 505 communicating with some storage 510 over a bus system 515. The storage 510 may include a hard disk and/or random access memory ("RAM") and/or removable storage such as a floppy magnetic disk 517 and an optical disk 520. The storage 510 is encoded with a data structure 525 storing the data set acquired as discussed above, an operating system 530, user interface software 535, and an application 565. The user interface software 535, in conjunction with a display 540, implements a user interface 545. The user interface 545 may include peripheral I/O devices such as a key pad or keyboard 550, a mouse 555, or a joystick 560. The processor 505 runs under the control of the operating system 530, which may be practically any operating system known to the art. The application 565 is invoked by the operating system 530 upon power up, reset, or both, depending on the implementation of the operating system 530.

Referring again to FIG. 1, the acoustic waves 125, their reception by seismic sensors 300 (first shown in FIG. 3), and the generation of data from the reflections 135 may be performed in conventional fashion. Thus, for instance, the seismic source 115 may be any seismic source known to the art, *e.g.*, a vibrator or an explosive charge. Similarly, the seismic sensors 305 (first shown in FIG. 3) may be implemented using any type of seismic sensor known to the art and suitable for the survey being implemented.

Data transmission to the data collection unit 120, however, is performed in accordance with the present invention. One BDAC 300 in each GDAC 200 is a "gateway" to

the GDAC 200. All communications to and from any BDAC 300 in the GDAC 200 to and from the central location mentioned above (e.g., the data collection unit 120) proceeds through the gateway BDAC 300. It is not material to the practice of the invention which particular BDAC 300 is designated the gateway, although range and power considerations in
5 any given implementation may influence the designation.

Referring now again to FIG. 2, each BDAC 205 that is not a gateway 210 transmits its data via its central transmitting unit 310 (first shown in FIG. 3) to the gateway 210 of its GDAC 200, as represented by the wireless links 215. The gateway 210 collects the data from
10 the other BDACs 205 and wirelessly transmits the accumulated data to the next GDAC 200 in the direction of the data collection unit 120, as represented by the wireless links 220. If there is no such GDAC 200, then the data is wirelessly transmitted directly to the recording unit 120, as represented by the wireless link 225. Thus, seismic data is transmitted in this "cascaded" fashion across the seismic recording array 105 and, ultimately to a CSC. Note
15 that the any given GDAC 200 receives data transmitted by only one other GDAC 200. Thus, the wireless links 220, 225 represent a plurality of independent pathways, each containing a portion of the gateways whereby data may be transmitted along each pathway via the gateways and associated transmitters in that pathway. In some embodiments, information can also be transmitted to the BDACs 205 and gateways 210 back over these same pathways.

20

Data can be transmitted between GDACs 200 in one of at least two ways. First, data may be transmitted in a continuous, or asynchronous, mode. In this mode, gateway 210_i transmits to gateway 210_{i+1} when data is ready for transmission, without regard for when gateway 210_{i+1} transmits data to 210_{i+2} . In this fashion, each gateway 210 receives data
25 transmitted to it, assembles it with its own data, and transmits the resultant data set to the next gateway 210 in the pathway until the data reaches the data collection unit 120. Second, data may be transmitted in a discontinuous, or synchronous, mode. In this mode, data is transferred from gateway 210_i to gateway 210_{i+1} at the same time gateway 210_{i+2} transmits data to 210_{i+3} and at predefined periods. In the next predefined period, data is transferred
30 from gateway 210_{i+1} to gateway 210_{i+2} at the same time gateway 210_{i+3} transmits data. Thus, at a predetermined time half of the gateways 210 transmit what data it has to the next gateway 210 in the pathway and, at the next predetermined time, the second half transmits its data to the next gateway 210..

In the illustrated embodiment, the data is transmitted over the wireless links 220, 225 using the 802.11 standard. The 802.11 standard is a family of specifications developed by the Institute of Electrical and Electronics Engineers ("IEEE") for wireless local area network ("LAN") technology. 802.11 specifies an over-the-air interface between a wireless client and a base station or between two wireless clients. There are several specifications in the 802.11 standard, including:

- 802.11—applies to wireless LANs and provides 1 or 2 Mbps transmission in the 2.4 GHz band using either frequency hopping spread spectrum ("FHSS") or direct sequence spread spectrum ("DSSS").
 - 802.11a—an extension to 802.11 that applies to wireless LANs and provides up to 54 Mbps in the 5GHz band. 802.11a uses an orthogonal frequency division multiplexing encoding scheme rather than FHSS or DSSS.
 - 802.11b (also referred to as "802.11 High Rate" or "Wi-Fi")—an extension to 802.11 that applies to wireless LANs and provides 11 Mbps transmission (with a fallback to 5.5, 2 and 1 Mbps) in the 2.4 GHz band. 802.11b uses only DSSS.
 - 802.11g—which applies to wireless LANs and provides 20+ Mbps in the 2.4 GHz band.
- Other standards, however, may be used in alternative embodiments. However, in various implementations, the communications over the wireless links 22, 225 may employ either frequency division or time division multiplexing techniques.

In the embodiment illustrated in FIG. 2, neither the BDACs 205, 210 nor the GDACs 200 overlap. However, this is not necessary to the practice of the invention. Indeed, where increased transmission bandwidth is desired, two or more GDACs 200 may overlap. Consider the embodiment 600 in FIG. 6A. In FIG. 6A, each GDAC 605 comprises a gateway BDAC 610 (only one indicated) and multiple BDACs 615 (only one indicated) that do not serve as gateways. The GDACs 605 overlap, and the overlap defines a length L for the GDACs 605 different from their coverage range R . Note that the overlaps vary and, consequently, $L_{i-1} \neq L_i \neq L_{i+1}$. Note also that the coverage range R is less than the maximum coverage range R_{max} , i.e., $R_i < R_{imax}$. One consequence of the difference between the actual range R and the maximum range R_{max} is a "secure overlap." The overlap is secure in the

sense that it provides a spatial margin for error in data transmission. FIG. 6B illustrates communications between the BDACs 615 and the gateway BDAC 610 in each GDAC 605. FIG. 6C illustrates communications between the GDACS 605.

Note that these physical characteristics can impact operational performance. For instance, Table 1 illustrates how the GDAC length L impacts bit rates under two different 802.11 standard specifications.

Table 1. GDAC Length L vs. Bit Rates

	750 m	500 m	250 m	150 m	60 m	50 m	35 m	25 m
In door (54 Mbps)	X	X	X	X	5 Mbps	10 Mbps	35 Mbps	54 Mbps
In door (11 Mbps)	X	X	X	X	1 Mbps	2 Mbps	5.5 Mbps	11 Mbps
Out door (54 Mbps)	X	X	X	X	X	X	X	X
Out door (11 Mbps)	1 Mbps	2 Mbps	5.5 Mbps	11 Mbps	11 Mbps	11Mbps	11 Mbps	11 Mbps

Those skilled in the art having the benefit of this disclosure will also appreciate other ways in which the physical characteristics of the GDACs affect operational performance. For instance, the distance between the gateways 610 may be limited to meet transmission licensing constraints and/or to improve reliability. Note that the characteristics presented in Table might change over time due to improvements in the seismic survey system and/or protocols employed.

Other variations may also be employed. GDACs may, for instance, also be interleaved, and communications may be conducted using more than one carrier frequency. Consider the embodiment 700 in FIG. 7, in which the GDACs 705 are interleaved and in which the GDACS 705 communicating on different carrier frequencies are indicated in different hatch patterns. Thus, the "top" line 710 communicates on a first carrier frequency

and the "bottom" line 715 communicates on a second frequency. Each of the lines 710, 715 communicates in the manner illustrated by FIG. 6A – FIG. 6C, with communications within GDACs 705 conducted as shown in FIG. 6B and communications between GDACs 705 conducted as shown in FIG. 6C. Eventually, the data communicated through the top line 710 and through the bottom line 715 is transmitted to the CSC, e.g., the recording truck 110 or the fixed-base facility 140 in FIG. 1. Note, however, that communications through the top line 710 on the first carrier frequency constitute a separate, independent pathway to the CSC relative to the communications through the bottom line 715.

In larger spreads, bandwidth can be increased by the use of "relay points" on the independent pathways. FIG. 8A illustrates one such embodiment 800, which is a 10 km long spread, divided into two 5 km long "zones of coverage." Each zone of coverage is separated into 2.5 km areas. Each relay point RP is positioned, in this particular embodiment, to roughly divides the 5 km zone of coverage into the 2.5 km areas. Note that the distances are not material to the practice of the invention. Similarly, the relay points RP need not necessarily divide the zone of coverage in half in all implementations of this embodiment.

The relay points RP act as wireless bridges between the data acquisition and the data collection. In the illustrated embodiment, they are implemented using Cisco Aironet 340 Series Wireless Bridges commercially available "off the shelf" from Cisco Systems, Inc., 170 West Tasman Dr., San Jose, California 95134, U.S.A. Information about these bridges is readily available at this address, by phone at (800) 553-NETS, or over the World Wide Web at www.cisco.com. However, the invention is not so limited and any suitable electronic device may be used.

Still referring to FIG. 8A, the spread comprises 8 "lines" 802 – 816 of GDACs 820 (only one indicated). Each line 802 – 816 operates on one of four carrier frequencies indicated by four different hatching patterns. Thus, lines 802, 810 operate on a first carrier frequency; lines 804, 812 operate on a second carrier frequency; lines 806, 814 operate on a third carrier frequency; and lines 808, 816 operate on a fourth carrier frequency.

In operation, the GDACs 820 transmit their data in the asynchronous mode discussed above, as shown in FIG. 8B. As the gateway 310₀ gathers data collected in the GDAC 820₀,

it transmits it to the gateway 310₁. The gateways 310₁, 310₂ act similarly with respect to data collected from the its respective GDAC₁, GDAC₂ and preceding GDAC 820₀, 820₁, respectively. Data is handled in the same manner by the gateways 310₆, 310₇. However, the data does not continue to cascade across all GDACs 820 in the lines 802 – 816. Instead, the gateways 310₃, 310₄ transmit data collected by their GDAC₃, GDAC₄ and the preceding GDACs in its independent pathway to the relay point RP, which relays the data to the data collection unit 120.

Returning now to FIG. 8A, each relay point RP serves one 5 km zone of coverage for one set of lines 802 – 808, 810 - 816. Thus, in the illustrated embodiment, each line 802 – 816 includes two gateways 310₃, 310₄, as shown in FIG. 8B, that transmit to a relay point RP, which then relays the data to the data collection unit 120. In one particular implementation, the invention achieved performance as good as or better than conventional wired acquisition systems. This performance included a bandwidth of 144 kbps x N, where N is the number of sensors (up to 100,000 “1D” or “3D” geophones); real time data acquisition and transmission to a central system for computing and storing, and a range of 10 km x 5 km for the spread. Table 2 presents some operational parameters for an implementation such as that in FIG. 8A, FIG. 8B, assuming 11 Mbps and two relay points with an 802.11 protocol.

Table 2. Operational Parameters

Compression	“1D” Geophone	“3D” Geophone
None	$20\text{m} \leq \text{BDAC} \leq 50\text{m cell} \leq 250\text{m}$	$\text{BDAC} = 50\text{m cell} \leq 250\text{m}$
Compression factor = 2	$10\text{m} \leq \text{BDAC} \leq 50\text{m cell} \leq 250\text{m}$	$30\text{m} \leq \text{BDAC} \leq 50\text{m cell} \leq 250\text{m}$

Note that the practice of the invention does not require that the data be transmitted from one GDAC to another in the “cascaded” fashion shown in the embodiments discussed above. In sufficiently small spreads, such as the one shown in FIG. 9, comprising only a few GDACs 900, the BDACs 905 transmit the data they collect to the gateway BDAC 910 as was discussed above. However, the gateway BDACs 910 transmit their data and the data received from the other BDACs 905 directly to the data collection unit 120, rather than through other

GDACs 900. Thus, the wireless links 925 constitute the independent pathways in such an embodiment.

Note also that, in the illustrated embodiments, all the communications pathways are
5 shown as substantially linear, the cells are shown have rectangular geometries, and the cells
are arranged in "lines" running left to right. However, these conventions are employed for
ease and clarity in illustration, and the invention is not limited in these respects. The cells
may employ other geometries, and the communications pathways may be substantially non-
linear in alternative embodiments. Also, the left to right orientation of the lines in the
10 illustrated embodiments is a convenience for clarity in illustration. The invention admits
wide variation in these aspects.

The particular embodiments disclosed above are illustrative only, as the invention
may be modified and practiced in different but equivalent manners apparent to those skilled
15 in the art having the benefit of the teachings herein. Furthermore, no limitations are intended
to the details of construction or design herein shown, other than as described in the claims
below. It is therefore evident that the particular embodiments disclosed above may be altered
or modified and all such variations are considered within the scope and spirit of the invention.
Accordingly, the protection sought herein is as set forth in the claims below.

20

CLAIMS:

1. A seismic survey system, comprising:
a plurality of data sources positioned about an area to be surveyed, each data source being associated with a transmitter capable of transmitting data;
5 a plurality of cells each containing a portion of the data sources and their associated transmitters, one of the transmitters within each cell also serving as a gateway for receiving data transmitted from the other data source transmitters within the cell; and
a plurality of independent pathways each containing a portion of the gateways whereby data may be transmitted along each pathway via the gateways and associated transmitters in
10 that pathway.
2. The seismic survey system of claim 1, further wherein the transmitter capable of transmitting data comprises a transmitter capable of wirelessly transmitting data.
3. The seismic survey system of claim 1, further comprising a computing and storing center for receiving the data transmitted along each pathway.
- 15 4. The seismic survey system of claim 3, further comprising at least a pair of relay points through which the data transmitted along each independent pathway is relayed to the computing and storing center.
5. The seismic survey system of claim 1, further comprising a fixed-base facility to which the data is transmitted.
- 20 6. The seismic survey system of claim 5, further comprising a recording truck through which the data is transmitted to the fixed-base facility.
7. The seismic survey system of claim 1, wherein the transmitters capable of transmitting data are capable of transmitting data in an asynchronous mode.
8. The seismic survey system of claim 1, wherein the transmitters capable of
25 transmitting data are capable of transmitting data in a synchronous mode.
9. The seismic survey system of claim 1, wherein the data is transmitted along each independent pathway according to frequency division multiplexing.

10. The seismic survey system of claim 1, wherein the data is transmitted along each pathway according to time division multiplexing.
11. The seismic survey system of claim 1, wherein the distance between gateways of adjacent cells is limited according to transmission licensing constraints.
- 5 12. The seismic survey system of claim 1, wherein the distance between gateways of adjacent cells is limited to improve reliability.
13. The seismic survey system of claim 1, wherein the pathways are substantially linear.
14. The seismic survey system of claim 1, wherein the cells overlap.
15. The seismic survey system of claim 1, wherein the cells are interleaved.
- 10 16. A seismic survey system, comprising:
a plurality of cells each containing a plurality of data sources, wherein:
at least one of the data sources also serves as a gateway;
the data sources within each cell are associated with a transmitter for
transmitting data to the gateway within that cell, and
15 the gateways of adjacent cells are associated with a transmitter for transmitting
data between one another; and
a plurality of independent pathways each containing a portion of the gateways
whereby data may be transmitted along each pathway via the gateways
and associated transmitters in that pathway.
- 20 17. The seismic survey system of claim 16, further wherein the transmitter capable of
transmitting data comprises a transmitter capable of transmitting data via a wireless means.
18. The seismic survey system of claim 16, further comprising a computing and storing
center for receiving the data transmitted along each pathway.
19. The seismic survey system of claim 18, further comprising at least a pair of relay
25 points through which the data transmitted along each independent pathway is relayed to the
computing and storing center.

20. The seismic survey system of claim 16, further comprising a fixed-base facility to which the data is transmitted.

21. The seismic survey system of claim 20, further comprising a recording truck through which the data is transmitted to the fixed-base facility.

5 22. The seismic survey system of claim 16, wherein the transmitters capable of transmitting data are capable of transmitting data in an asynchronous mode.

23. The seismic survey system of claim 16, wherein the transmitters capable of transmitting data are capable of transmitting data in a synchronous mode.

24. The seismic survey system of claim 16, wherein the data is transmitted along each
10 independent pathway according to frequency division multiplexing.

25. The seismic survey system of claim 16, wherein the data is transmitted along each pathway according to time division multiplexing.

26. The seismic survey system of claim 16, wherein the distance between gateways of adjacent cells is limited according to transmission licensing constraints.

15 27. The seismic survey system of claim 16, wherein the distance between gateways of adjacent cells is limited to improve reliability.

28. The seismic survey system of claim 16, wherein the pathways are substantially linear.

29. The seismic survey system of claim 16, wherein the cells overlap.

30. The seismic survey system of claim 16, wherein the cells are interleaved.

20 31. A method of conducting a seismic survey, comprising:
positioning a plurality of seismic data sources about an area to be surveyed;
defining a plurality of cells such that each cell contains a portion of the seismic data
sources;
defining one of the seismic data sources within each cell to also serve as a gateway;
25 defining a plurality of independent pathways such that each pathway contains a portion of
the gateways;

within each respective cell, transmitting seismic data from the seismic data sources to the gateway; and

within each pathway, transmitting the seismic data from one gateway to another to reach a central location.

5 32. The method of claim 31, wherein transmitting the seismic data includes transmitting the seismic data using one of frequency division multiplexing and time division multiplexing.

33. The method of claim 31, wherein defining the plurality of cells includes constraining the definition with transmission licensing constraints.

34. The method of claim 31, wherein defining the plurality of cells includes constraining
10 the distance between cells to improve reliability.

35. The method of claim 31, wherein defining the plurality of cells includes defining a plurality of overlapping cells.

36. The method of claim 31, wherein defining the plurality of cells includes defining a plurality of interleaved cells.

15 37. The method of claim 31, wherein defining the independent pathways includes defining the independent pathways such that they include at least a pair of relay points through which the seismic data is transmitted to the central location.

38. A method for use in seismic surveying, comprising:
collecting a plurality of seismic data at a plurality of seismic data sources, the seismic data
20 sources being organized into a plurality of cells, each cell including a gateway;
transmitting the collected seismic data through a plurality of independent pathways through the gateways to a central location;
collecting the transmitted seismic data at the central location.

39. The method of claim 38, wherein transmitting the collected seismic data includes
25 transmitting the collected seismic data using one of frequency division multiplexing and time division multiplexing.

40. The method of claim 38, wherein the cell definitions are constrained with transmission licensing constraints.

-
41. The method of claim 38, wherein the distance between cells is constrained to improve reliability.
42. The method of claim 38, wherein the cells overlap.
43. The method of claim 38, wherein cells are interleaved.
-
- 5 44. The method of claim 38, wherein defining the independent pathways include at least a pair of relay points through which the collected seismic data is transmitted to the central location.

SEISMIC ACQUISITION SYSTEM

ABSTRACT

An apparatus and method for collecting data acquired during a seismic survey are disclosed. The apparatus is a seismic survey system, comprising a plurality of data sources, a plurality of cells, and a plurality of independent pathways. The data sources are positioned about an area to be surveyed, each data source being associated with a transmitter capable of transmitting data. The cells each contain a portion of the data sources and their associated transmitters. One of the transmitters within each cell also serves as a gateway for receiving data transmitted from the other data source transmitters within the cell. The independent pathways each contain a portion of the gateways whereby data may be transmitted along each pathway via the gateways and associated transmitters in that pathway. The method is a method for conducting a seismic survey. The method comprises positioning a plurality of seismic data sources about an area to be surveyed; defining a plurality of cells such that each cell contains a portion of the seismic data sources; defining one of the seismic data sources within each cell to also serve as a gateway; defining a plurality of independent pathways such that each pathway contains a portion of the gateways; within each respective cell, transmitting seismic data from the seismic data sources to the gateway; and, within each pathway, transmitting the seismic data from one gateway to another to reach a central location.

[Figure 2]

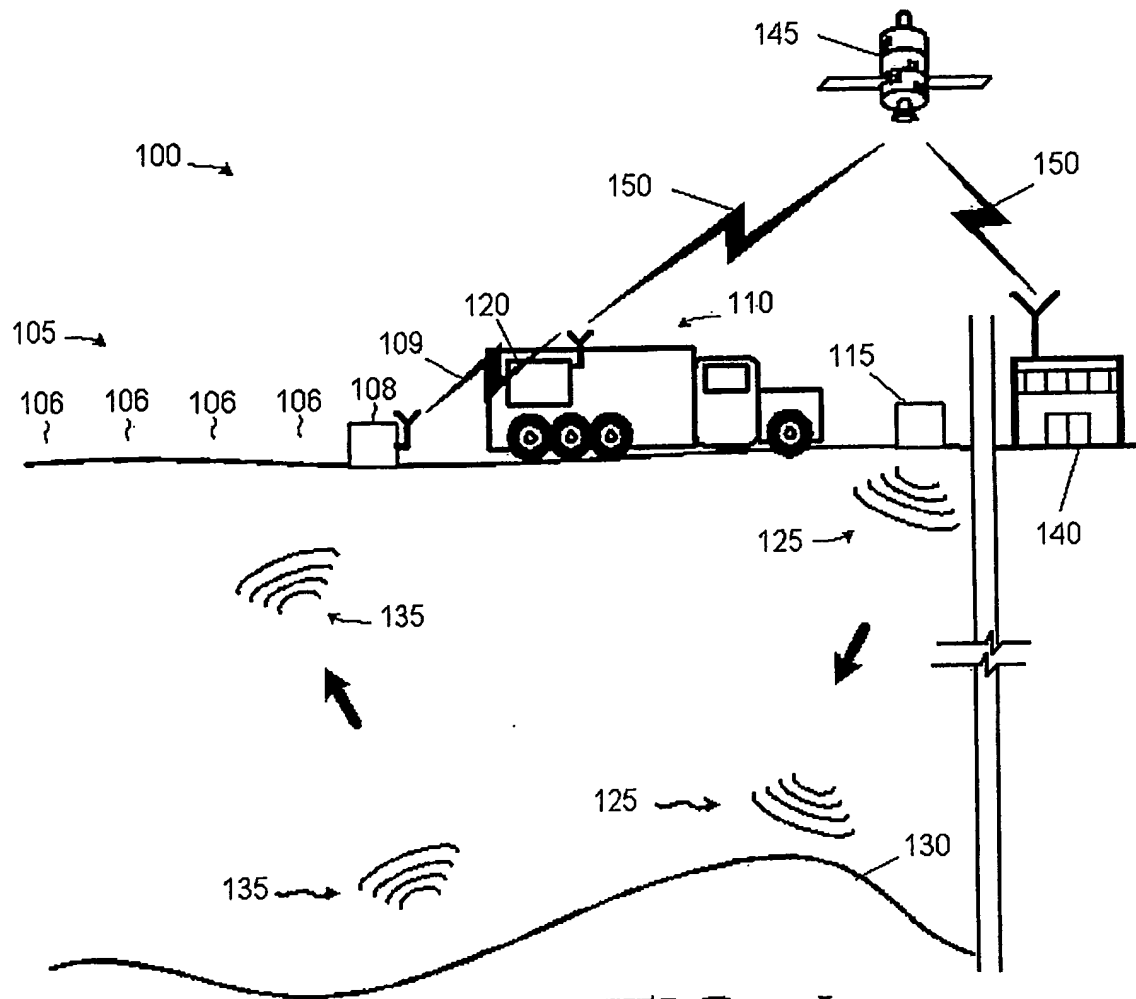


FIG. 1

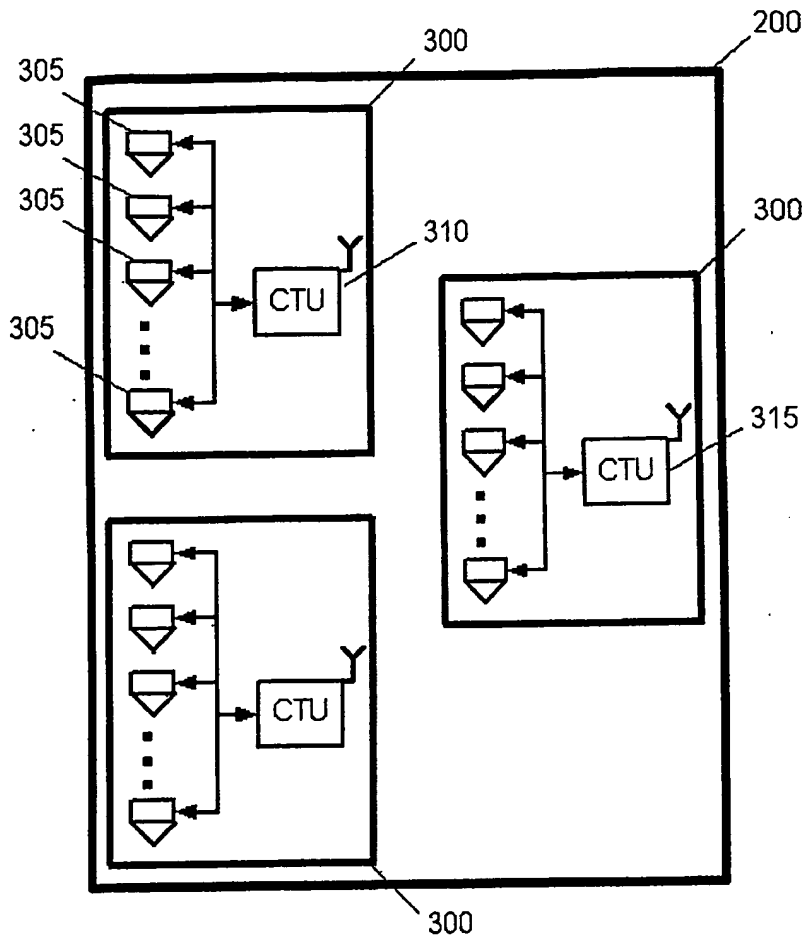


FIG. 3

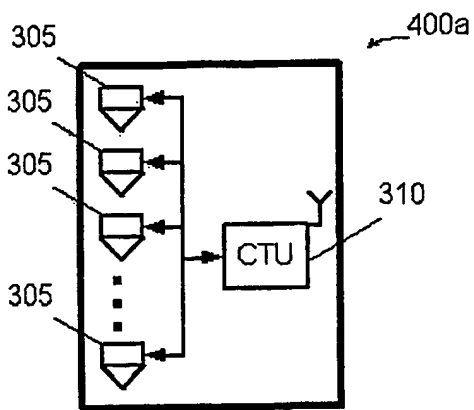


FIG. 4A

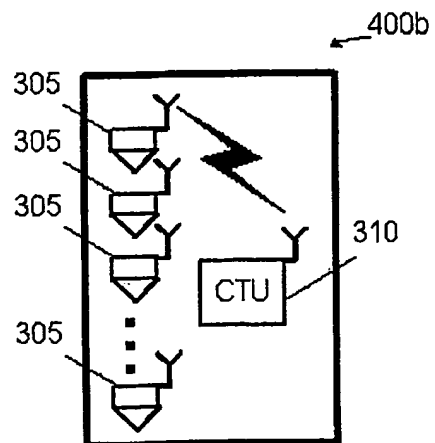


FIG. 4B

4 / 9

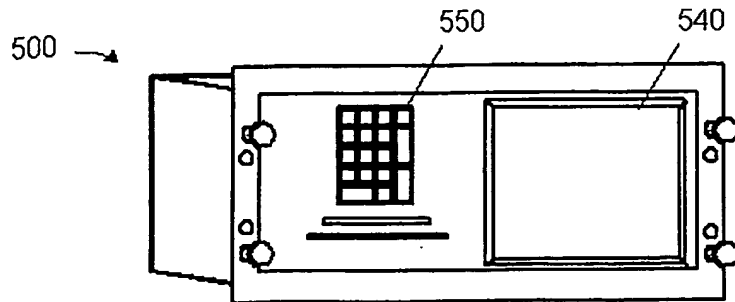


FIG. 5A

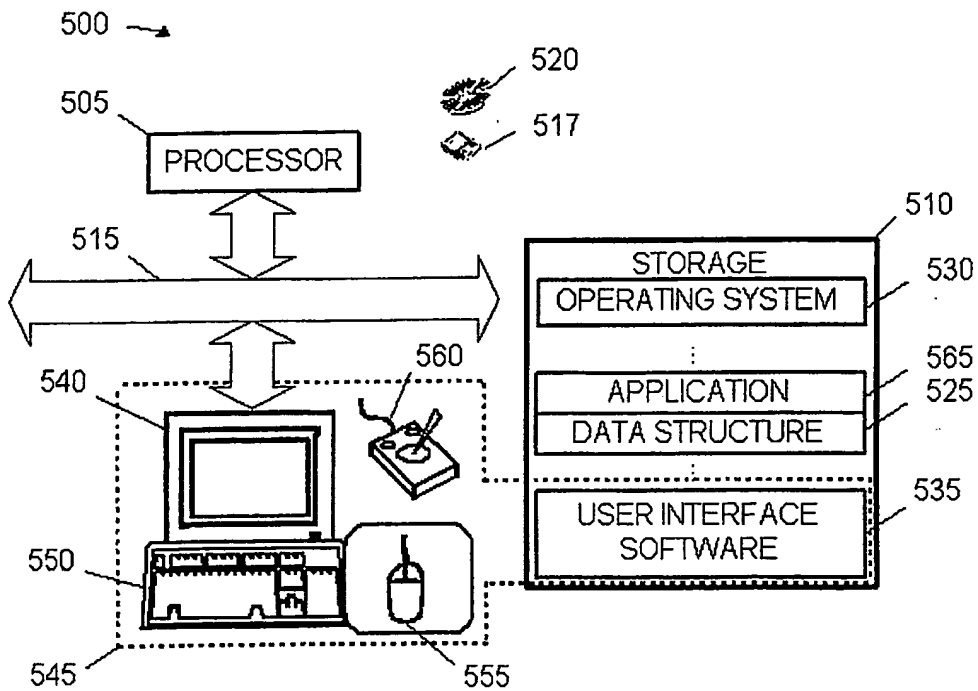


FIG. 5B

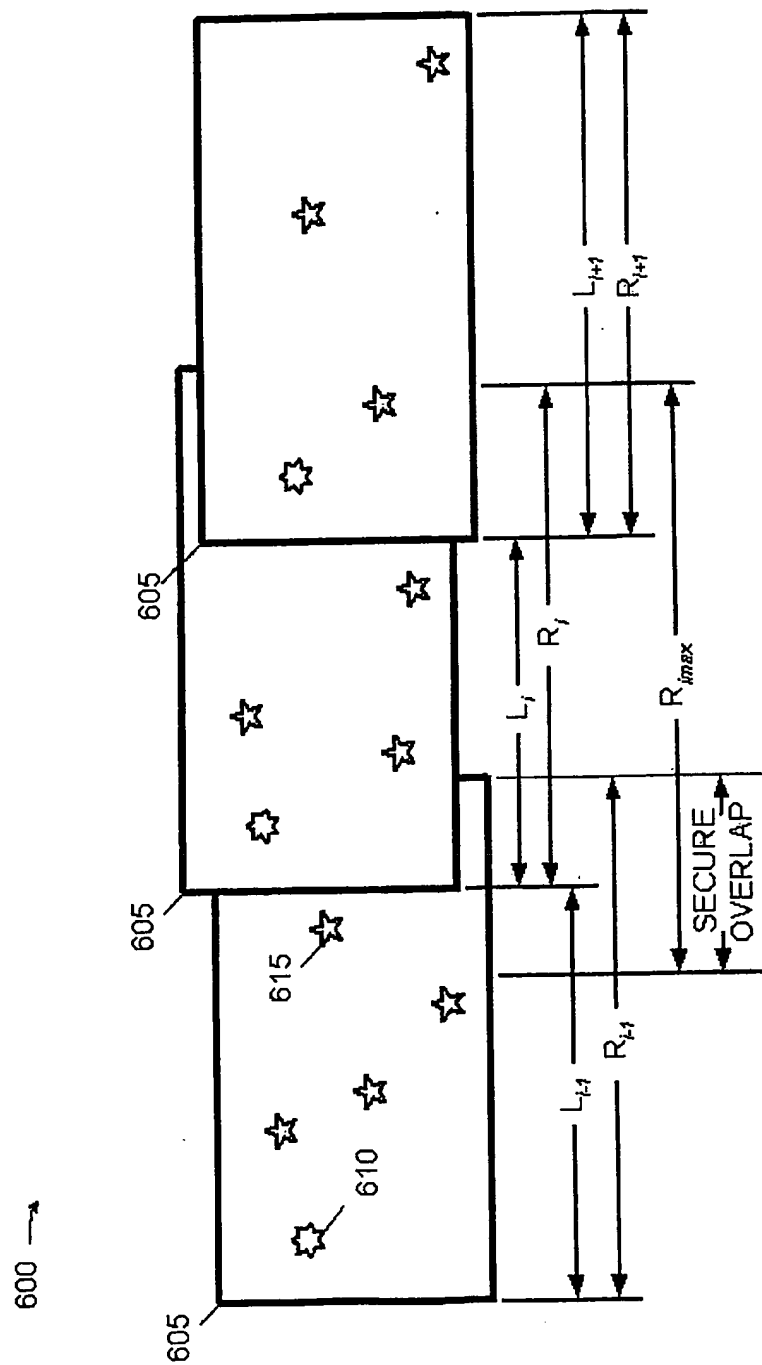


FIG. 6A

600 —

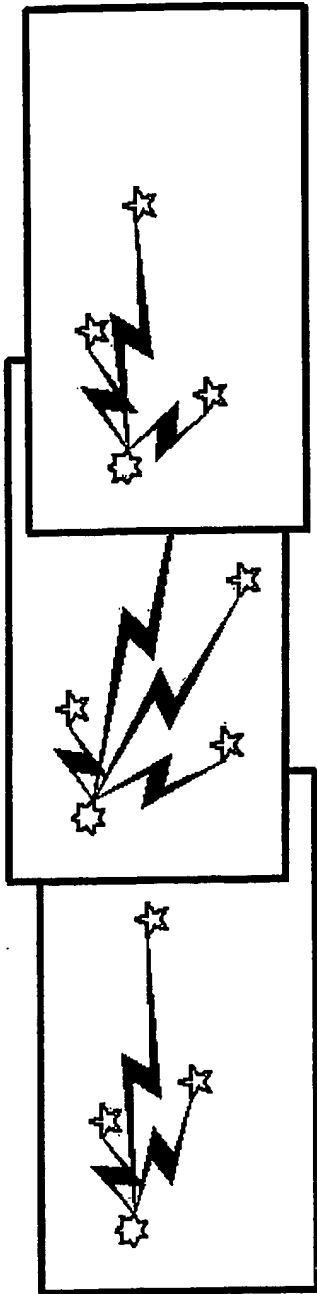


FIG. 6B

600 —

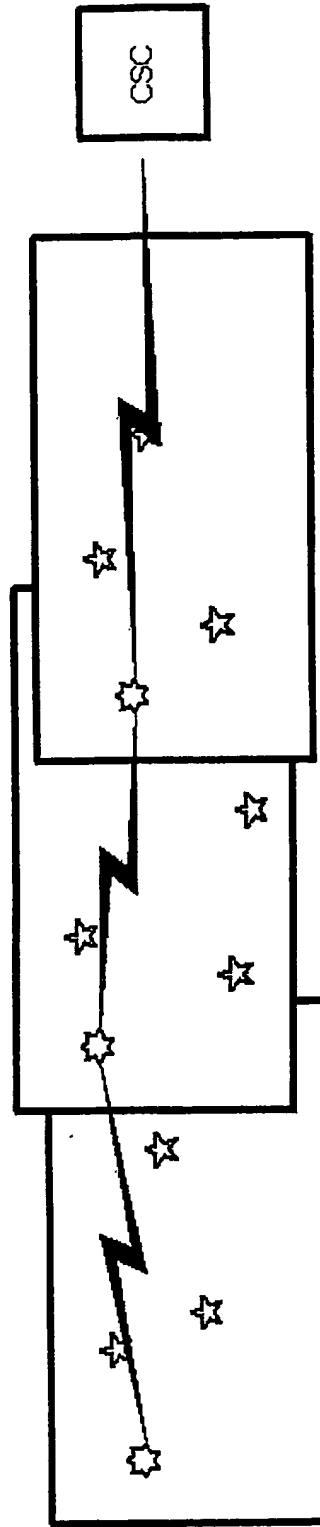


FIG. 6C

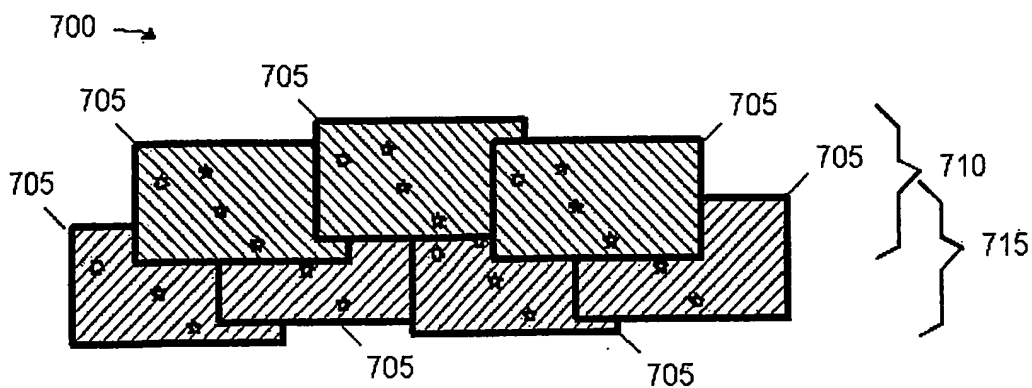


FIG. 7

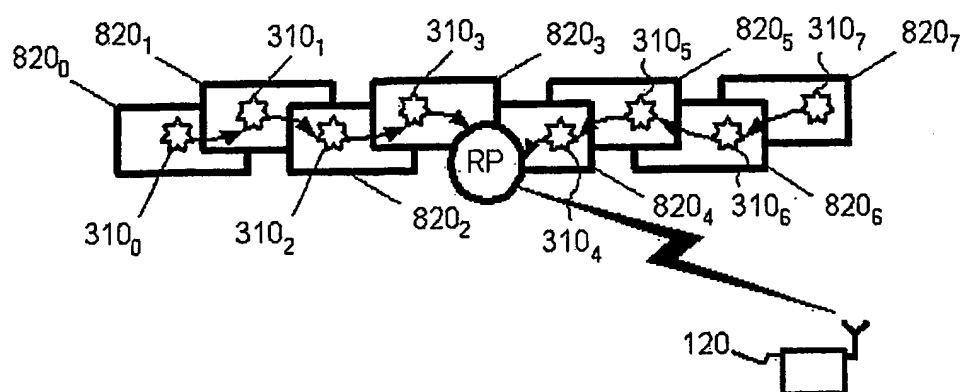


FIG. 8B

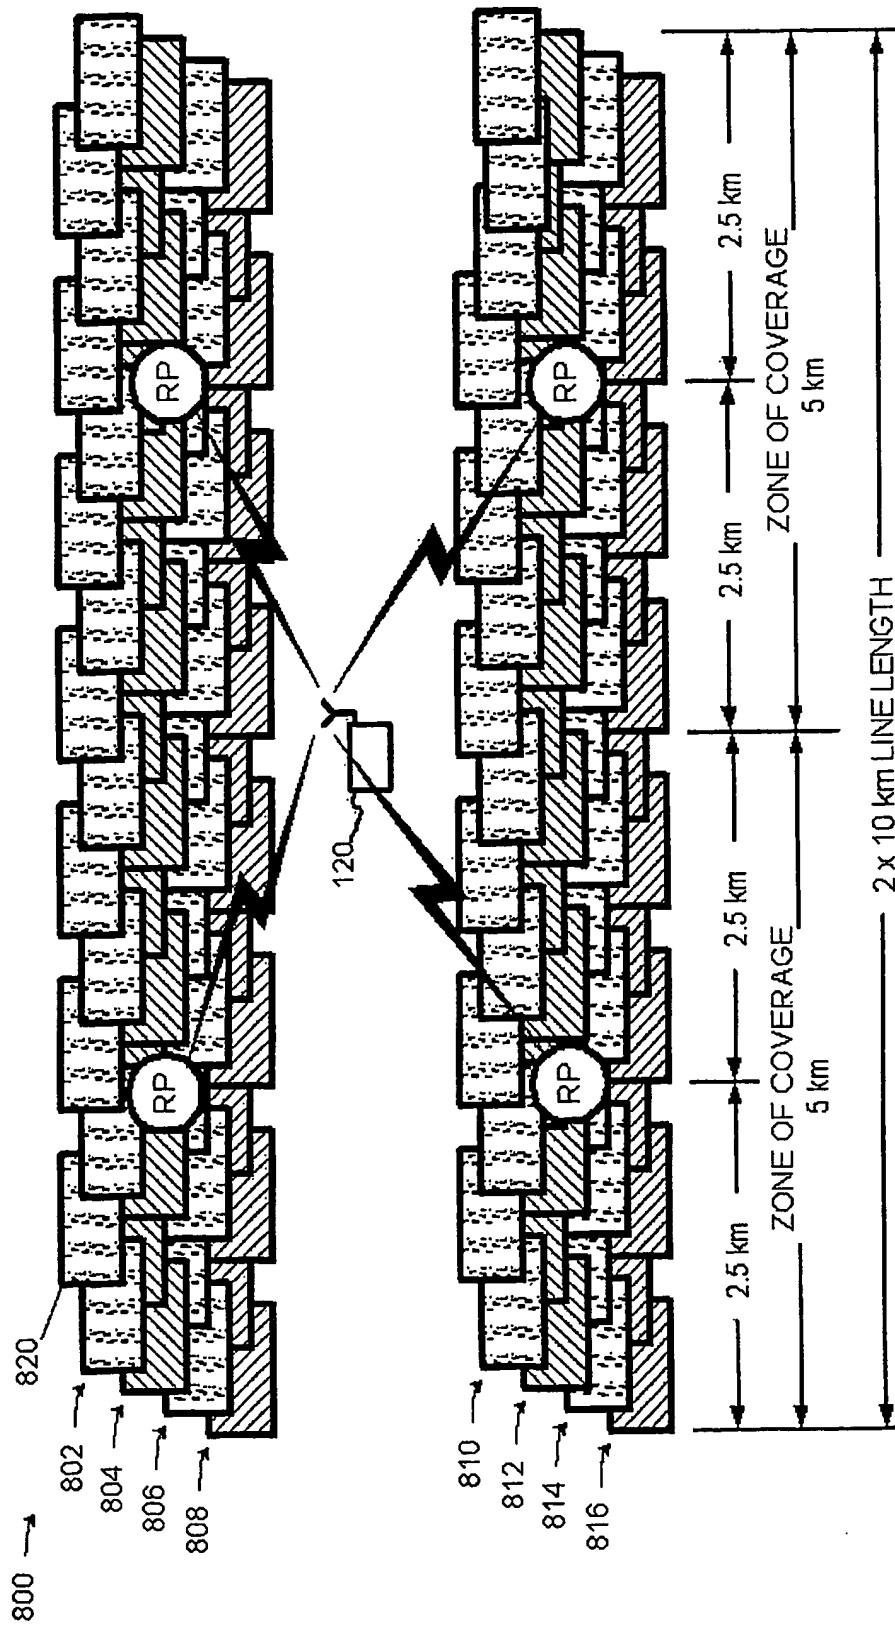


FIG. 8A

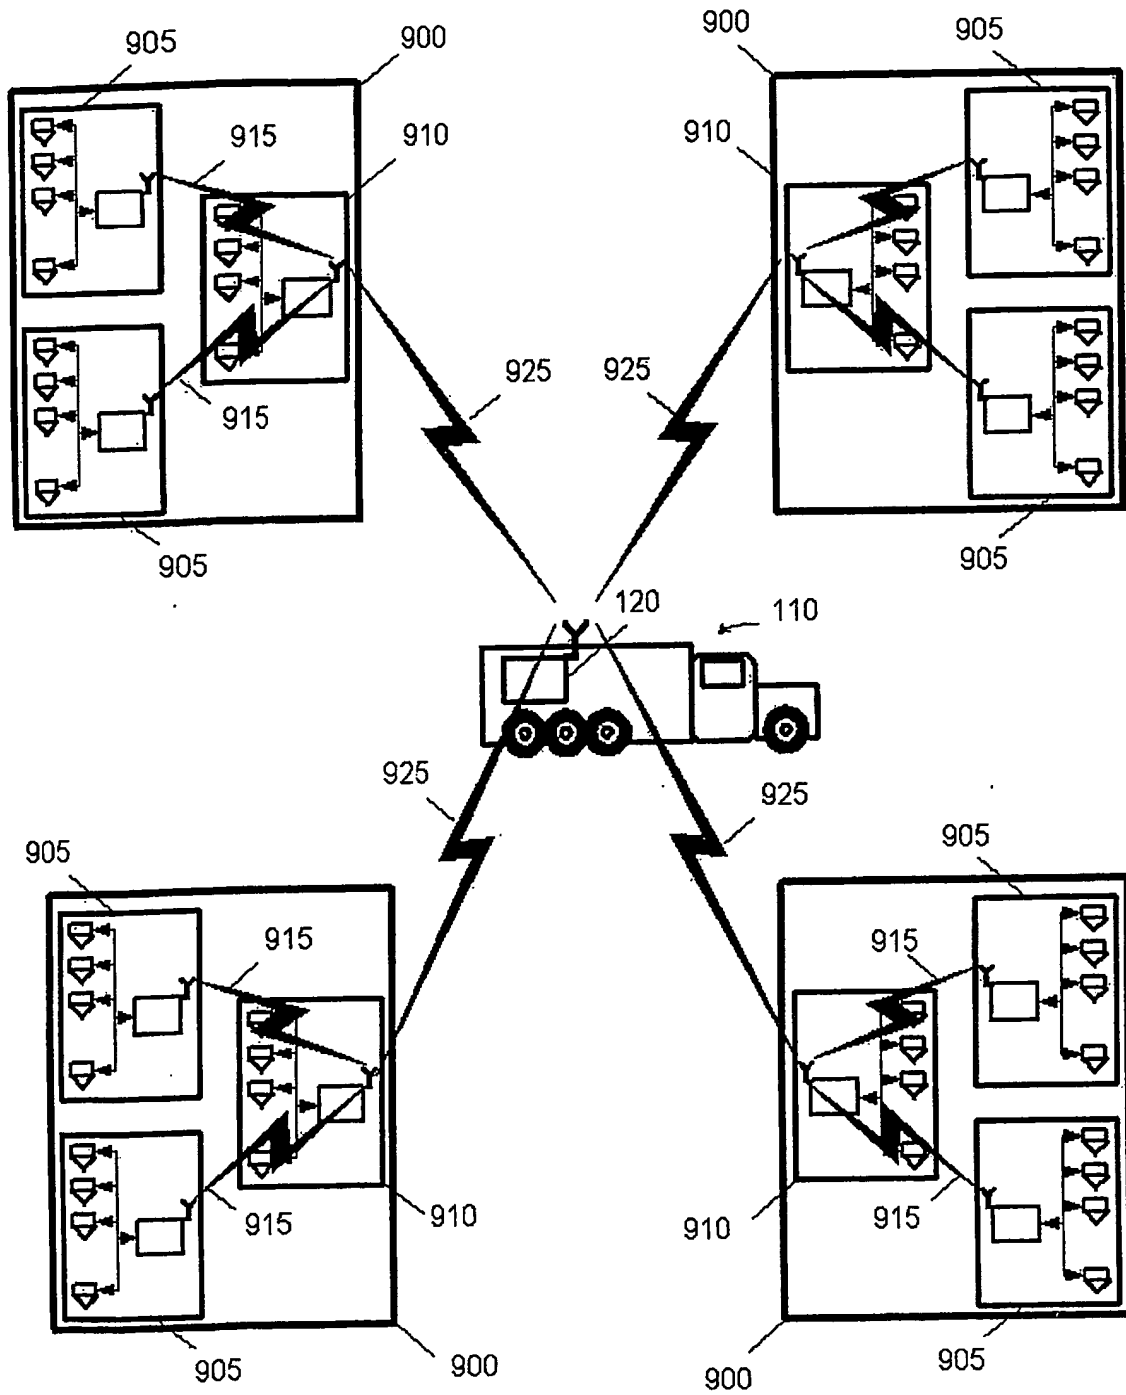


FIG. 9

PCT Application
PCT/EP2003/050872



**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.